


# The Munro LP Centrifugal Pump

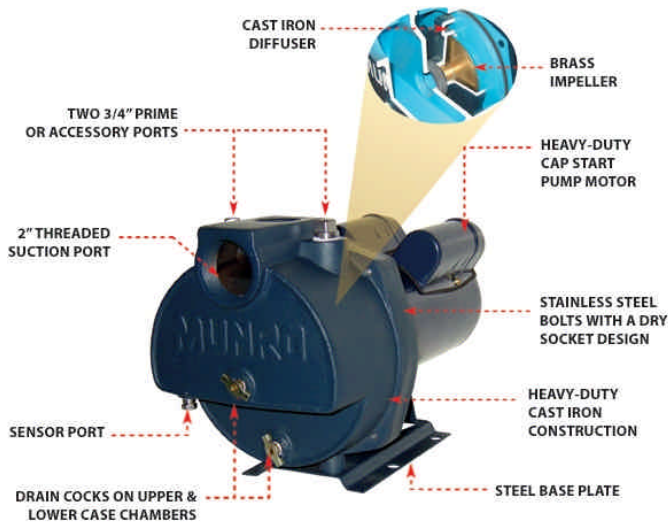

## Specifications

Model Number	Phase	HP	Suction Lift Feet
LP075B	1	3/4	1.5
LP100B	1	1	1.5
LP150B	1	1-1/2	2
LP200B	1	2	2
LP300B	1	3	2
LP075B3	3	3/4	2
LP075B3	3	1	2
LP075B3	3	1-1/2	2
LP075B3	3	2	2
LP075B3	3	3	2

The Munro LP Series pumps range from 3/4" hp to 3 hp. Applications include Pond, Self-Priming, Contractor, Fountain, Irrigation, and Marine. Motors are wired for 230v (high) as standard. To use on 115v (low) follow motor name plate wiring diagram. Motors are Lincoln brand. Pump rotation is CCW from pump-end.

Munro Residential Series SFLP pumps are engineered to exacting standards. The diffuser, brackets, and volutes are all made of cast iron while the impeller is constructed of polycarbonate. The SFLP series also feature leak-proof mechanical seals, easy service design, heavy-duty double ball-bearing motors and rugged yet economical construction. They are especially suited for general purpose "lawn sprinkler" applications. In some applications the use of a foot valve is recommended..

Model Number	Shut Off Pressure PSI	Suction Pipe Tap	Discharge Pipe Tap
LP075B	41	2"	1-1/2"
LP100B	48	2"	1-1/2"
LP150B	47	2"	1-1/2"
LP200B	50	2"	1-1/2"
LP300B	63	2"	1-1/2"
LP075B3	41	2"	1-1/2"
LP075B3	48	2"	1-1/2"
LP075B3	47	2"	1-1/2"
LP075B3	50	2"	1-1/2"
LP075B3	63	2"	1-1/2"

